



# MAX CORPORATION

TOTAL APPAREL SOLUTION

**JUKI**  
Industrial Sewing Machine

 **HASHIMA**  
Apparel Finishing Machine

**DOLLOR**  
SEWING MACHINE

**amida**  
Industrial Sewing Attachment

**SIRUBA**<sup>®</sup>  
INDUSTRIAL SEWING MACHINE

 **KAW**  
Cutting Machine, Japan

**Aerostar**  
Finishing Mashinery

**BOSHITE**  
LED LAMP FOR SEWING MACHINE

**KANSAI**  
SPECIAL<sup>®</sup>

**MARTIN**  **GROUP**  
FUSING MACHINES - PRESSE PER TERMOADESIVI  
MADE IN ITALY

**LSK**  
HIGH SPEED LINKING MACHINE

**ABS**  
Finishing Mashinery

[www.maxcorporationbd.com](http://www.maxcorporationbd.com)



**Arifur Rahman**  
CEO



Established in 2012, **Max Corporation** is a forward looking Indenting & Trading Company Focused on Industrial Cutting, Sewing and Finishing machinery In Bangladesh. Through the last Ten years, we have Sold and Installation **RMG** machinery with our Customer satisfaction along with a very strong technical service team. Our capital partner Is **Juki, Hashima, KM, Siruba, Amida, Dollor, Aerostar, Lsk, Boshite, Martin Group**. We manage your machines, so that you can manage your business.

Every year we are attending different international trade fares all around the world to enrich our knowledge on **RMG** industry of Bangladesh. Here are few glimpse of such events.



## Direct-drive, Overlock / Safety Stitch Machine

### MO-6700DA Series

JUKI's dry-head technology has been introduced to the Mo-6700S, which has excellent seam quality and higher productivity. Only The parts which mainly contribute to oil splashes are improved to have dry mechanisms to create the semi-dry-head overlock machine, MO6700DA series. As a result, oil stains on the sewn products are eliminated.



Model name	MO-6704DA	MO-6714DA	MO-6716DA	MO-6743DA
Stitch type	1-needle overlock	2-needle overlock	Safety stitching	3-needle Safety stitching
Max. sewing speed	7,00sti/min			
Stitch length	0.8~4mm		1.5~4mm	
Needle gauge	--	2.0, 3.2mm	2.3, 4.8, 4.8+2.0, 3.2+2.0mm	3.2+2.0, 4.8+2.0mm
Overedging width	1.6, 3.2, 4.0, 4.8mm	2.0, 3.2, 4.0, 4.8mm	2.3, 4.0, 4.8, 6.4mm	3.2mm
Bottom differential feed ratio	For gathering 1:2 (Max. 1:4), For stretching 1:0.7 (Max. 1:0.6)			
Needle	DCx27 (excluding some subclass model)			

## Feed-off-the-arm, Double Chainstitch Machine

### MS-1190 (2-needle, for light- to medium weight)

### MS-1261 (3-needle, for heavy-weight)

Thanks to the thread guide located between the needle bar thread take-up and the intermediate tention release lever, the timing to tense the needle thread can be decreased.

As a result, the machine is capable of beautiful stitches with a soft appearance even when heavy-weight material is used.

Model name	MS-1190	MS-1190M
Application	Light-weight	Medium-weight
Max. sewing speed	4,000sti/min	
Needle gauge	3.2mm (1/8")~6.4mm (1/4")	
Stitch length	1.2~3.2mm	
Needle	TVx64 NY (#12) #8~#14 B-64 (Nm80) Nm60~Nm90	TVx64 NY (#16) #12~#19 B-64 (Nm100) Nm80~Nm120

Model name	MS-1190	MS-1190M
Application	Light-weight	Medium-weight
Max. sewing speed	4,000sti/min	
Needle gauge	3.2mm (1/8")~6.4mm (1/4")	
Stitch length	1.2~3.2mm	
Needle	TVx64 NY (#12) #8~#14 B-64 (Nm80) Nm60~Nm90	TVx64 NY (#16) #12~#19 B-64 (Nm100) Nm80~Nm120







### HASIMA NEEDLE DETECTOR-HN-790G-120/ HN-2790G-120

MODEL	HN-790G/120	HN-2790G-120
Detection Method	Magnetic Induction	Magnetic Induction
Detection Ability	Fe0.8Φ sphere or above	Fe0.8Φ sphere or above
Detection Width	600mm	600mm
Detection Height	120mm	120mm
Alarm Method	Buzzer Position Lump	Buzzer Position Lump
Belt Speed	40~15m/min	40~15m/min
Power Supply	1 Phase	1 Phase
Rated Output	150w	150w
Weight	230kg	374kg
Dimension	1598(L)X950(W)X903(H)mm	2423(L)X1040(W)X903(H)mm



### HASHIMA FUSING MACHINE-HP-450MS

MODEL	HP-450MS
Power Supply	1 Phase or 3 Phase
Heater Rated Output/Heater	Heater: 4 KW
Heater Rated Output/Motor	Motor: 33 W
Max Temperature	195°C
Max Pressure	1.5kg/cm
Max Belt Speed	8.7m/min
Pressing Time	5-20 sec
Fusing Width	450mm
Weight	152kg
Dimension	1660X880X940mm



### HASHIMA FUSING MACHINE-HP-900LA/LAS

MODEL	HP-600LA/LAS	HP-900LA/LAS
Power Supply	3 Phase	3 Phase
Heater Rated Output/Heater	Heater: 8.4 KW	Heater: 12 KW
Heater Rated Output/Motor	Motor: 250/275 W	Motor: 270/295 W
Max Temperature	195°C	195°C
Max Pressure	62N/cm (6.04kgf/cm)	41N/cm (4.02kgf/cm)
Max Belt Speed	10.2m/min	10.2m/min
Pressing Time	6-28 sec	6-28 sec
Fusing Width	600mm	900mm
Weight	480kg	600kg
Dimension	3100X1190X1200mm	3300X1490X1200mm



### HIGH SPEED THREAD WINDER-HW-20C/40C

MODEL	HW-20C	HW-40C
Power Supply	1 Phase	1 Phase
Rated Output	80w	80w
Timer	15min	15min
Speed	1380r.p.m	1380r.p.m
Weight	19.5kg	25kg
Dimension	770X480X380mm	770X490X660mm





### KM CUTTING JAPAN-KS-AUV 10"/8"

KS-AU, Straight Knife Cloth Cutting Machine with Automatic Abrasive Belts Sharpener, is the most popular cutting machine in the Garment Industry. It's suitable for cutting all kinds of fabrics from thin materials to thick materials.




### NEEDLE DETECTOR TEST CARD HOLDER

**0.8mm Test Card**  
**1.0mm Test Card**  
**1.2mm Test Card**



### HANDY TYPE NEEDLE DETECTOR- HN-30S

- **Detection Fe  $\phi$ 0.8mm sphere**  
 This new handy type needle detector can detect  $\phi$ 0.8 mm steel at 5mm height from detecting unit surface.
- **Battery save function**  
 Under stand by, Battery mode is changed to save mode automatically and save battery consumption. When take it by hand, the machine start automatically. New designed detecting circuit is low electric consumption.

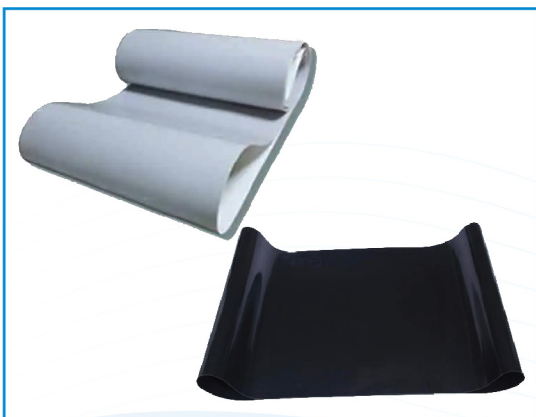

### CONVEYOR BELT FOR FUSING & NEEDLE DETECTOR

**Hashima Needle detector Model: HN-770G, HN-780G, HN-790G, HN-2770G, HN-2870G, HN-2790G,**

**Hashima Fusing Machine Model: HP-450MS, HP-600B/LS/LFS, HP-900/LS/LFS, HP-1000LR/LW, HP-1200LS**



## VACCU IRON TABLE -AS-1300B

MODEL	AS-1300	AS-1300B
Power Supply	220v	220v
Motor Power	0.55kw	0.55kw
Arm	No Arm	Single Arm
Rpm	1400	1400
Table Size	800X1300mm	800X1300mm



## ELECTRIC/PNEUMATIC SNAP BUTTON MACHINE

MODEL	AS-808	AS-Q1
Power Supply	220v	220v
Motor Power	Electric	Pneumatic
Max Speed/Presser	300 Round/min	6-8kg
Stroke	34	40
Table Size	800X1300mm	800X1300mm



## ENERGY SAVING SERVO MOTOR (BELT TYPE)

Model	JM-800	JM-800
Voltage	220V+10%	220V+10%
Frequency	50/60Hz	50/60Hz
Output Power	550W	750W
Max. Speed	5000RPM	4000RPM
Needle Position	P-02(Optional)	P-02(Optional)
Gross Weight	4/6kg	4/6kg
Packing Size	550x350x260mm	550x350x260mm



## THREAD WINDING MACHINE

MODEL	AS-20S	AS-40S
Power Supply	1 Phase	1 Phase
Rated Output	80w	80w
Timer	15min	15min
Speed	1380r.p.m	1380r.p.m
Weight	19.5kg	25kg
Dimension	770X480X380mm	770X490X660mm




## THREAD CUTTING MACHINE COMPLETESET (DOUBLE HEAD WITH 750W MOTOR)

MODEL : AEROSTAR AS-2K  
 HS CODE : 8451.50.00  
 HEAD : 20 CARTON  
 MOTOR : 3 CARTONS



## BUTTON PULL TEST MACHINE

CHINA MADE BUTTON PULL TEST MACHINE WITH ALL OTHERS STANDARD ACCESSORIES COMPLETE SET Hs CODE : 8451.80.00

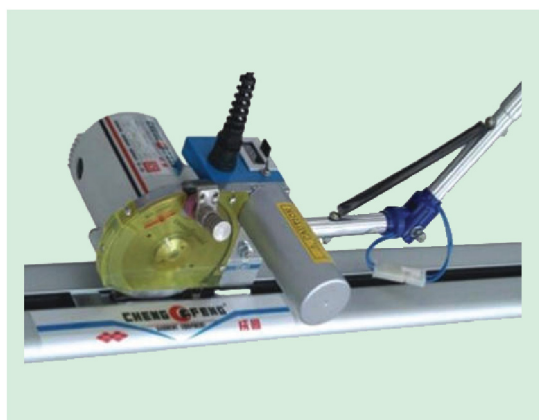

## FABRIC END CUTTER WITH 2.8M RAIL

Model	AS-B11-D/CZD-B11
Voltage	220/110V
Frequency	50/60Hz
Power	100mm
Cutting Height	0~4mm
Cutting Width	1~3m
Rail Length	2.20~2.80mm
Time Delay	0
Gross Weight	14Kg
Packing Size	580x370x190mm



## ROUND KNIF CUTTING

MODEL	AS-110
Voltage	220/110V
Frequency	50/60Hz
Power	100W
Cutting Height	25mm
Knife Speed	660RPM
Knife Size	100mm/110mm
Gross Weight	3.50Kg
Packing Size	353x263x177mm

For Cotton, Wool, linen, Silk, Chemical Fiber etc.



**TD-3 TD-5 TD-6 TD-6DH**



TD-3 NEW



TD-5



不可调光  
Without brightness adjustable

TD-6




三档调光  
3-levels brightness adjustable

TD-6DH

Model: TD-3 TD-5 TD-6 TD-6DH  
Power: 0.5W  
Voltage: AC 100-240V DC5V  
Link: Motor Switch  
Application: Any Sewing Machine  
Note: This is hi-performance LED lamp  
Use high-performance magnetic lamp holder  
Theoretical service-life is around 60,000 hours  
Save 90% energy compare to traditional fluorescent light

**TD-10 TD-20**

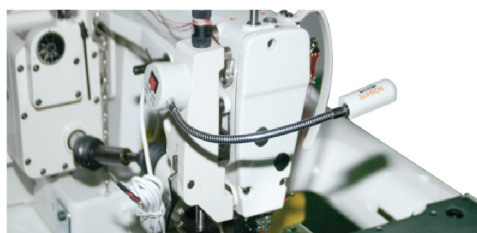

TD-10  $\Phi 6 \times 180$



Model: TD-10  
Power: 0.5W  
Voltage: AC 100-240V  
Frequency: 50/60HZ  
Link: Motor Switch  
Application: Any Sewing Machine  
Note: This is hi-performance SMD-LED lamp  
Use high-performance magnetic lamp holder  
The illumination angle can be adjusted freely  
Theoretical service-life is around 60,000 hours  
Have 5-levels colour temperature adjustable function  
Save 90% energy compare to traditional fluorescent light

## TD-1B Powerful Laser Lamps




型号 Model	LD功率 Laser Power	LD电压 Laser Voltage	LD电流 Laser Current	工作距离 Working Hight	线宽 Line Width	线长 Line Length	焦距 Focal Distance	电源电压 Supply Voltage	电源功率 Supply Power	频率 Frequency
— 一字 Line Laser	100mW	2.7V	150mA	1000~2000mm	1~2mm	2m/4m	可调 Adjustable	AC 100~240V	2W	50/60Hz
+ 十字 Cross Laser	100mW	2.7V	150mA	1000~2000mm	1~2mm	2m/4m	可调 Adjustable	AC 100~240V	2W	50/60Hz
— 一字 Line Laser	200mW	2.7V	280mA	1000~2000mm	1~2mm	8m	可调 Adjustable	AC 100~240V	2W	50/60Hz
+ 十字 Cross Laser	200mW	2.7V	280mA	1000~2000mm	1~2mm	8m	可调 Adjustable	AC 100~240V	2W	50/60Hz
— 一字 Line Laser	30mW	7V	120mA	1000~2000mm	1~2mm	2m/4m	可调 Adjustable	AC 100~240V	2W	50/60Hz
+ 十字 Cross Laser	30mW	7V	120mA	1000~2000mm	1~2mm	2m/4m	可调 Adjustable	AC 100~240V	2W	50/60Hz
— 一字 Line Laser	50mW	7V	150mA	1000~2000mm	1~2mm	8m	可调 Adjustable	AC 100~240V	2W	50/60Hz
+ 十字 Cross Laser	50mW	7V	150mA	1000~2000mm	1~2mm	8m	可调 Adjustable	AC 100~240V	2W	50/60Hz

## TD-1 Laser Lamps



型号 Model	LD功率 Laser Power	LD电压 Laser Voltage	LD电流 Laser Current	工作距离 Working Hight	线宽 Line Width	线长 Line Length	焦距 Focal Distance	电源电压 Supply Voltage	电源功率 Supply Power	频率 Frequency
· 点 Point Laser	5mW	2.7V	20mA	100~500mm	1~2mm	20~100mm	可调 Adjustable	AC 100~240V/DC 5V	1W	50/60Hz
— 一字 Line Laser	5mW	2.7V	20mA	100~500mm	1~2mm	20~100mm	可调 Adjustable	AC 100~240V/DC 5V	1W	50/60Hz
+ 十字 Cross Laser	5mW	2.7V	20mA	100~500mm	1~2mm	20~100mm	可调 Adjustable	AC 100~240V/DC 5V	1W	50/60Hz

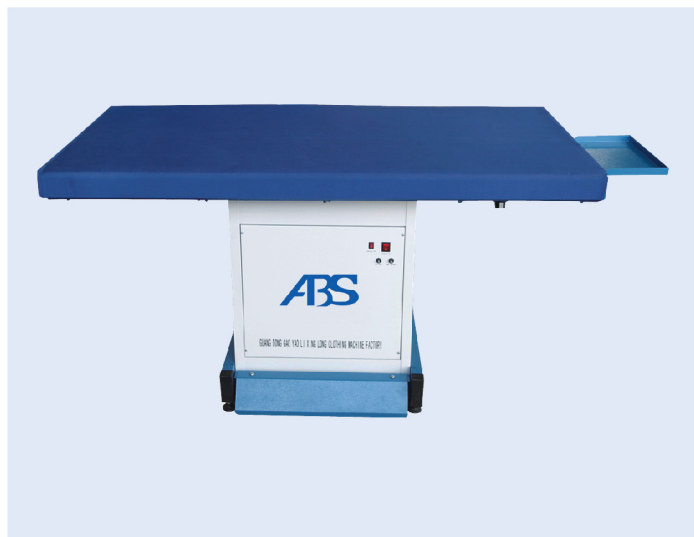


## SQUARE IRONING TABLE

MODEL	ST-1200S	ST-1500S
Voltage	220/380V	220/380V
Motor Power	800W	800W
Motor Rotation Speed	2800r/min	2800r/min
Electrical Heating Power	1kw	1kw
Table Size	800X1250mm	800X1500mm

### Advantages:

- Strong Suction
- Low Noise
- Low Vibration
- Table Heating and Drying
- Adjustable Height
- Energy-Saving Limit Switch
- Copper Wire Motor
- Optional Table With Steam Heating

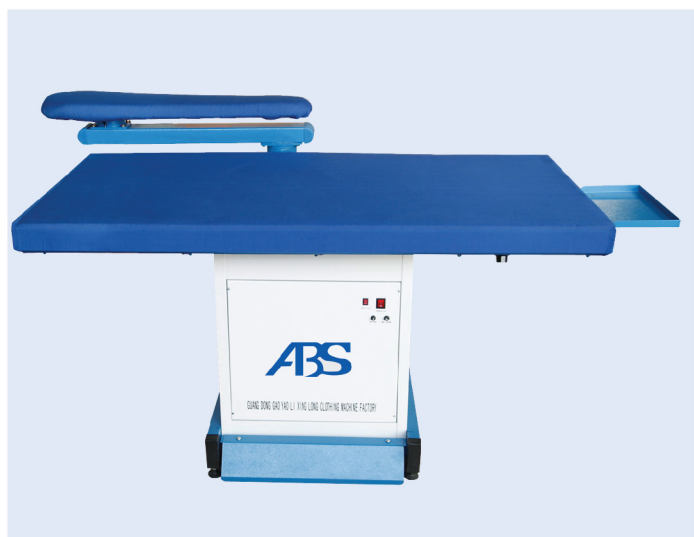


## SINGLE ARM IRONING TABLE

MODEL	ST-1200B	ST-1500B
Voltage	220/380V	220/380V
Motor Power	800W	800W
Motor Rotation Speed	2800r/min	2800r/min
Electrical Heating Power	1kw	1kw
Table Size	800X1250mm	800X1500mm

### Advantages:

- Strong Suction
- Low Noise
- Low Vibration
- Table Heating and Drying
- Adjustable Height
- Energy-Saving Limit Switch
- Copper Wire Motor
- Optional Table With Steam Heating

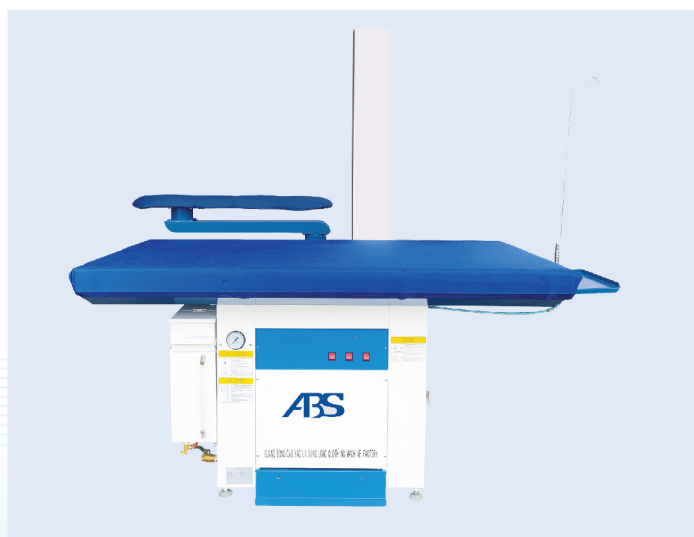

## IRONING TABLE INBUILT STEAM GENERATOR

MODEL	ST-880	ST-880
Voltage	220/380V	220/380V
Motor Power	800W	800W
Motor Rotation Speed	2800r/min	2800r/min
Electrical Heating Power	4kw	5.5kw
Steam Production	6kg	9kg
Steam Pressure	0.45Mpa	0.45Mpa
Table Size	800X1250mm	800X1500mm

### Advantages:

- Integrated Design
- Movable Casters
- Large Caliber Heating Tube
- High Efficiency & Energy Saving
- Stainles steel Stove





## PIANO SHAPE IRONING TABLE

MODEL	ST-1050
Voltage	220/380V
Motor Power	800W
Motor Rotation Speed	2800r/min
Electrical Heating Power	1kw
Table Size	1410X560XR130mm

### Advantages:

- Strong Suction
- Low Noise
- Low Vibration
- Table Heating and Drying
- Energy-Saving Limit Switch
- Copper Wire Motor
- Optional Table With Steam Heating



## THREAD SUCTION MACHINE

MODEL	ST-560A
Voltage	4kw
Motor Power	11676m3/h
Motor Rotation Speed	2800r/min
Suction Port Size	580X190mm
Inhaling Capacity	700pa

### Advantages:

- Strong Suction
- Low Noise
- Low Vibration
- Copper Wire Motor



## SMART ELECTRIC HEATING STEAM GENERATOR

MODEL	ST-380	ST-580
Voltage	220/380V	220/380V
Water Volume	5L	5L
Iron	1 Iron	2 Iron
Electrical Heating Power	4kw	5.5kw
Steam Production	5.7kg	9kg
Steam Pressure	0.45Mpa	0.45Mpa
Steam Temperature	151°	151°

### Advantages:

- Pneumatic Fast
- Steam Drying
- Pressure Stability (3.0-4.5kg/cm2)
- Intelligent Power Saving
- Vortex Pump
- Large Caliber Heating Tube




**DL7200-BH1-16**

China Assembled, Direct-drive, High-speed, 1-needle, Lockstitch Sewing Machine For Heavy-weight Material With Automatic Thread Trimmer, Thread Nipper, Auto-lifter, Built In Control Box And Operation Panel, Led Light, Compt. Set With China Made Table & Stand.



**747L-514M2-24/DKKU1-0**

China Made Ultra High Speed Overlock Machine, 2 Needle 4 Thread, For Medium Material, Needle Gauge 2.0mm, Overedge Width 4.0mm, With 220v Ac 550w China Made Direct Drive Servo Motor, China Made Table & Stand.

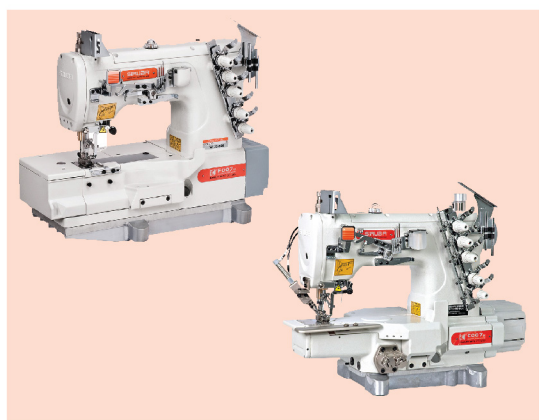

**F007KD-W122-356/FHA/DFKU1-0  
C007KP-W122-356/CH/DCKU1-0**

China Made High Speed Flat Bed Interlock Stitch Machine, General Plain Seaming, For Medium Material, 3 Needle, Needle Gauge 5.6mm, With Fha Hemming Device, With 220v Ac 550w China Made Direct Drive Servo Motor, China Made Table & Stand.

China Made High Speed Cylinder Bed Interlock Stitch Machine, General Plain Seaming, For Medium Material, 3 Needle, Needle Gauge 5.6mm, With Hemming Device, With 220v Ac 400w China Made Direct Servo Motor, China Made Table & Stand.



**S007KD-W122-356/PCH-3M/DSKU1-0**

China Made High Speed Direct Drive Small Cylinder Bed Interlock Stitch Machine, General Plain Seaming, For Medium Material, 3 Needle, Needle Gauge 5.6mm, With Pch-3m Bottom Hemming Device, With 220v Ac 550w China Made Direct Servo Motor, China Made Table & Stand.

# Apparel Auxiliary Mashinery



**Dino Rib Cutter-LU-933**



**Heat Press Machine**




**Silicon Foam**

Silicon Foam Width: 1.5 Meter,  
Length : 10 Meter/Roll.  
Cell: 01730110225




**Aqua-Boy moisture tester**

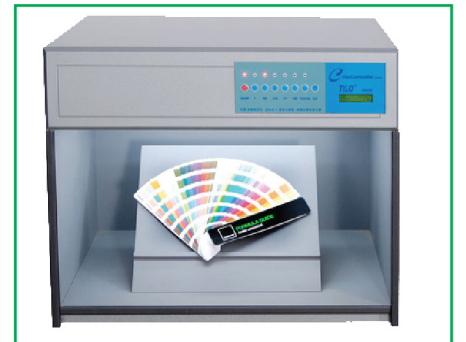

**Verivide Light Box**



**GSM Cutter and Scale**

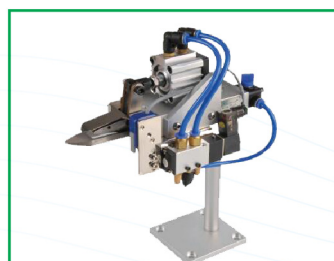

**Loop Cutter LT 1080**



**IBE Fusing Bon Tester**




**Button Pull Tester**




#### FT100-S 无刷固定刀头式

Fixed Style With Swirl Motor



F2S-25V



F2C-25U

<<< 以上为针织类刀片组

#### FT100-2 固定双刀头式

Fixed Style (Double-head)



优点：

- 1. 将传统手工剪线机械化、简易化，集剪线和集尘于一体操作，降低成本，不会剪破衣服、包缝线和细缝线，并有效创造清洁舒适的工作环境。
- 2. 有效确保高品质成衣一致性。
- 3. 操作简单，维修简单。

Advantages:

- 1. Trimming thread ends and collecting the waste with same pace, reduces trimming cost, eliminates scissor damage, and provides clean and comfortable working conditions.
- 2. Same trimming quality for the garments with no damage.
- 3. Easy to operate and maintain, no hurt to the labors' hands.

THREAD TRIMMER (FOR KNITTING GARMENT)

▶ **MT180-S 无刷活动刀头式**

Movable Style With Swirl Motor




Advantages:

1. Trimming thread ends and collecting the waste with same pace, reduces trimming cost, eliminates scissor damage and provides clean and comfortable working conditions.
2. Same trimming quality for the garments with no damage.
3. Easy to operate and maintain no hurt to the labors' hands.

▶ **MT180-F-N 翻裤板式**

Movable Style With Turner



M7S-25V



M7C-25V

技术参数 Technical Parameter

电压 Voltage	110V/220V
频率 Frequency	60/50Hz
转速 Speed	2850~3450RPM
功率 Power	120W~370W

#### LC360 包缝机气动集尘装置

#### Pneumatic Lint Collector(For Overlock Machine)




优点：

1. 创造优良环境：有效利用空气里对挡环、切屑和前盖内的灰尘进行强力集尘，保持清洁舒适的作业环境。
2. 降低成本：省时、省力，有效维护衣车运转，延长衣车寿命。
3. 易安装，适合所有品牌包缝机。
4. 可选择配置抬压脚装置。

Advantages:

1. Better environment: strongly suck up cutting waste and fine dust generated during sewing, providing clean and comfortable working conditions.
2. Lower cost: surely save time and labor, and keep the machines running well and longer life.
3. Easy to install and suitable for all brand overlock machines.
4. Optionally to install auto presser foot lift(PL device).

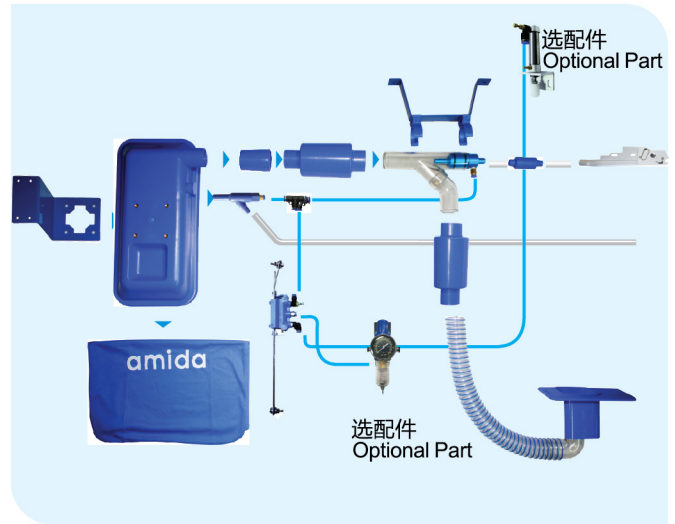

AFR-2000L  
调压过滤阀组  
Air Filter Regulator Assembly



360B  
真空发生组  
Vacuum Generation Assembly



LC-10  
小消音器  
Silencer Assembly



360A-2  
双方位脚踏开关组  
2-way Air Switch Assembly



360C  
线屑、布屑收集组  
Lint Collector Assembly



H6(Φ6×Φ4mm)  
气管  
Compressed Air Tubing



360A-3  
三方位脚踏开关组  
3-way Air Switch Assembly



360D  
吸屑漏斗组  
Waste & Lint Funnel Assembly



H12(Φ12mm)  
透明胶管  
Tube



SV-100(24V DC)  
电磁阀组件  
Solenoid Valve Switch Assembly




360E  
Y形管固定架组  
Bracket Assembly



H38(Φ38mm)  
透明筋条软管  
Hose



SV-200(24V DC)  
电磁阀组件  
Solenoid Valve Switch Assembly



LC-09  
大消音器  
Silencer Assembly



PL-100\*  
抬压脚装置  
Presser Foot Lift



TO-39 包缝机电动切带装置

Electric Tape Cutter(For Overlock Machine)



● 控制盒  
Control Box



● 手动开关组  
Manual Switch Assembly



● 电磁铁组  
Magnet Assembly





● 切刀组  
Tape Cutter Assembly

可配机型 Available Model

品牌 Brand	刀组型号 Model	配对机型 Available Model	功能 Function
JUKI	TO-39	MO-3600/3900/6700/6900	
PEGASUS	TK-M700	M700	
	TK-M800	M800	
	TK-MX	MX	
	TK-EX	EX	

TK-BF 绷缝机气动切带装置

Pneumatic Tape Cutter(For Interlock Stitch Machine)

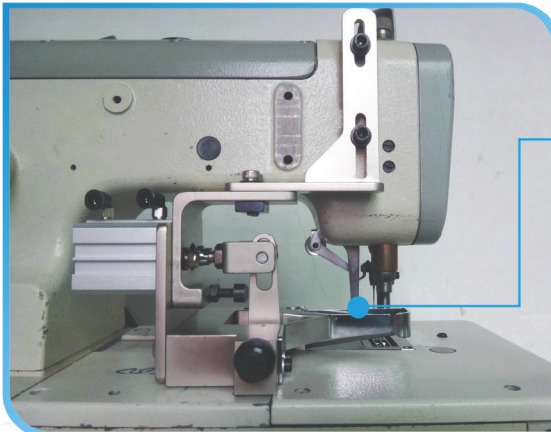

可配机型 Available Model

品牌 Brand	刀组型号 Model	配对机型 Available Model	功能 Function
PEGASUS	TK	W500	
YAMATO	TK-CF2300	CF2300	
	TK-VF2500	VF2500	
	TK	(General)	

广泛适用于：胸围、内衣、泳衣、波裤、运动服、弹性物料服等。

For underwear, sports wear etc.



**MC-E6U**

六段微电脑全方位送带机  
Tension Type Computerized  
Metering Device



**TFU-3S**

上送型送带机，三条带同步送带  
Upper Tape Feeder, Three Tapes  
Synchronously



**TFU 18-3**

上送型送带机，送料宽度80mm  
Upper Tape Feeder, Feed Width  
80mm



**TFU 16-3**

上送型送带机，送料宽度80mm  
Upper Tape Feeder, Feed Width  
80mm



**TFU 16-8**

上送型送带机，送料宽度200mm  
Upper Tape Feeder, Feed Width  
200mm



**TFU 16-3/UT-2**

上送型送带机，送料宽度80mm  
(附电动型防止打结装置)  
Upper Tape Feeder, Feed Width  
80mm (with untangling motor device)



**TFS 28-3**

侧送型送带机，送料宽度80mm  
Side Tape Feeder, Feed Width  
80mm



**TFS 26-3**

侧送型送带机，送料宽度80mm  
Side Tape Feeder, Feed Width  
80mm



**TFS 26-8**

侧送型送带机，送料宽度200mm  
Side Tape Feeder, Feed Width  
200mm



**TFS 26-3/UT-2**

侧送型送带机，送料宽度80mm  
(附电动型防止打结装置)  
Side Tape Feeder, Feed Width  
80mm (with untangling motor device)










LINT COLLECTOR DEVICE(PNEUMATIC TYPE)


LC360 包缝机气动集尘装置

Pneumatic Lint Collector(For Overlock Machine)










● 配离合器电机 For Clutch Motor

Model	360A-2	360A-3	360B	360C	360D	360E	LC-09	LC-10	H6	H12	H38	功能 Function
LC360	●		●	●	●	●	●	●	●	●	●	 
LC360-2M	●		●	●	●	●	2	●	●	●	●	 
LC360-3		●	●	●	●	●	●	●	●	●	●	  

● 配伺服电机 For Servo Motor

Model	SV-100	SV-200	360B	360C	360D	360E	LC-09	LC-10	H6	H12	H38	功能 Function
LC360-SV1	●		●	●	●	●	●	●	●	●	●	 
LC360-3-SV2		●	●	●	●	●	●	●	●	●	●	  

PL-100 抬压脚装置  
Presser Foot Lift

								
	JUKI MO-2300/2400 MO-3300/3600/ 3900 MO-6700/6900	PEGASUS M700 EX LX	PEGASUS M800 MX	BROTHER N V	YAMATO AZ/CZ  KANSAI UK	SIRUBA 747F	KANSAI JJ	TYPICAL GN3000D

LC360-BF 左/右切刀绷缝机气动集尘装置




Pneumatic Lint Collector(For Interlock Stitch Machine With Knives)






PL-300 抬压脚装置  
Presser Foot Lift

				
	JUKI MF-7823	JUKI MF-7923	PEGASUS W(T)200P W500(P) W(T)500P W(T)600P	PEGASUS W1500P W1600P W2600P
				
	YAMATO VC2700 VF2500  KINGTEX CT9000	YAMATO VC1790 VG2700	KANSAI WX RX NM	SIRUBA C007J

● 配离合器电机 For Clutch Motor

Model	360A-2	360A-3	360B	360C	LC-09	360E	H6	H24	功能 Function
LC360-BF	●		●	●	●	●	●	●	
LC360-BF-3		●	●	●	●	●	●	●	 

● 配伺服电机 For Servo Motor

Model	SV-100	SV-200	360B	360C	LC-09	360E	H6	H24	功能 Function
LC360-BF-SV1	●		●	●	●	●	●	●	
LC360-BF-3-SV2		●	●	●	●	●	●	●	 



#### SR-2000 去污台

##### Spot Removing Machine




Features:

1. Foot pedal control power switch, save electricity, lower noise.
2. Delicate and practicable stainless steel working face.
3. Strong spotting gun remove besmirch on cloth.
4. Two vessels to fill different eradicator, movable arm, easy to operate.

#### TS-1500/TS-3000 吸线头机

##### Thread Sucking Machine

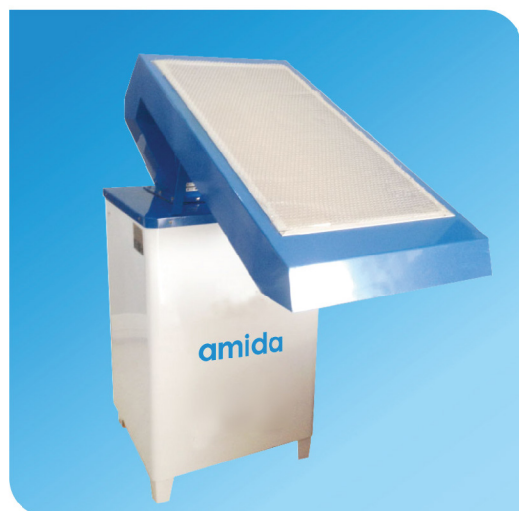


Features:

1. Suitable to suck the thread pieces, lint, small raffles in the garments.
2. It enhances the quality and increases the volume of
3. Visible object working table, extra-long air suction inlet, simple operation.
4. Low noise.

#### 技术参数 Technical Parameter

Model	TS-1500	TS-3000
Voltage	380V	
Frequency	50HZ	
Power	1.5KW	3KW
Rated Air Volume	3600m <sup>3</sup> /h	4800m <sup>3</sup> /h
Air Suction Pressure	350Pa	
Working Table Height	850mm	
Packing Size	1550x1440x680mm	
Gross Weight	200Kg	

SPARE PARTS




F2C(FT100)



Clipper Blade



F2C-25U  
Clipper Blade



F2-MSV  
Steel Movable Blade



M-MCV  
Ceramac Moveble Blade




F2-MCU  
Ceramac Moveble Blade



F2-01E/F2-01EX  
Suction Guard Piece




C80-09/C80-09U  
Spring Cover



F2SG  
Spring Pie ce



F2ST  
Support



F2SE  
Sliding Piece



F2-01F  
Cover



M7C (Mt 180)  
Blade Head Ass embly



M7C-25 V  
Clipper Blade



727  
Clipper Blade




C80-08/08x  
Eccentric Shaft



M7-01c  
Cover



M7SG  
Spring piece



4117  
Motor Brush



C80-01M  
Clipper Motor



C80-01A  
Back Cover



C80-01B  
Front Cover



EC100  
PCB Control Box



E80-02  
Circuit nBoard



E80-05  
Switch



E80-03  
Capacitor



H800/H1400  
House



F600/F780/F1600  
Flexible Shaft



S60-04  
Filter



S60-03  
Plastic Container




E80-07A  
Potention Meter



180  
Lube Oil



EC380A  
PCB Control Box



E380A  
Circuit Board



EC380B  
Photo-electric Switch Assembly



E380B  
Circuit Board



360A-2  
2-way Air switch Assembly



360A-3  
3-way Air Switch Assembly



H24  
Hose



H30  
Hose



H38  
Hose



S60-01M  
Suction Motor



S60-01R1  
Rotor(L=103mm)



S60-01M2  
Suction Motor



S60-01R2  
Rotor




S60-01M3  
Suction Motor



S60-01R3  
Rotor (L=149mm)

# LSK


DIRECT DRIVE ENERGY SAVING  
HIGH SPEED LINKING MACHINE

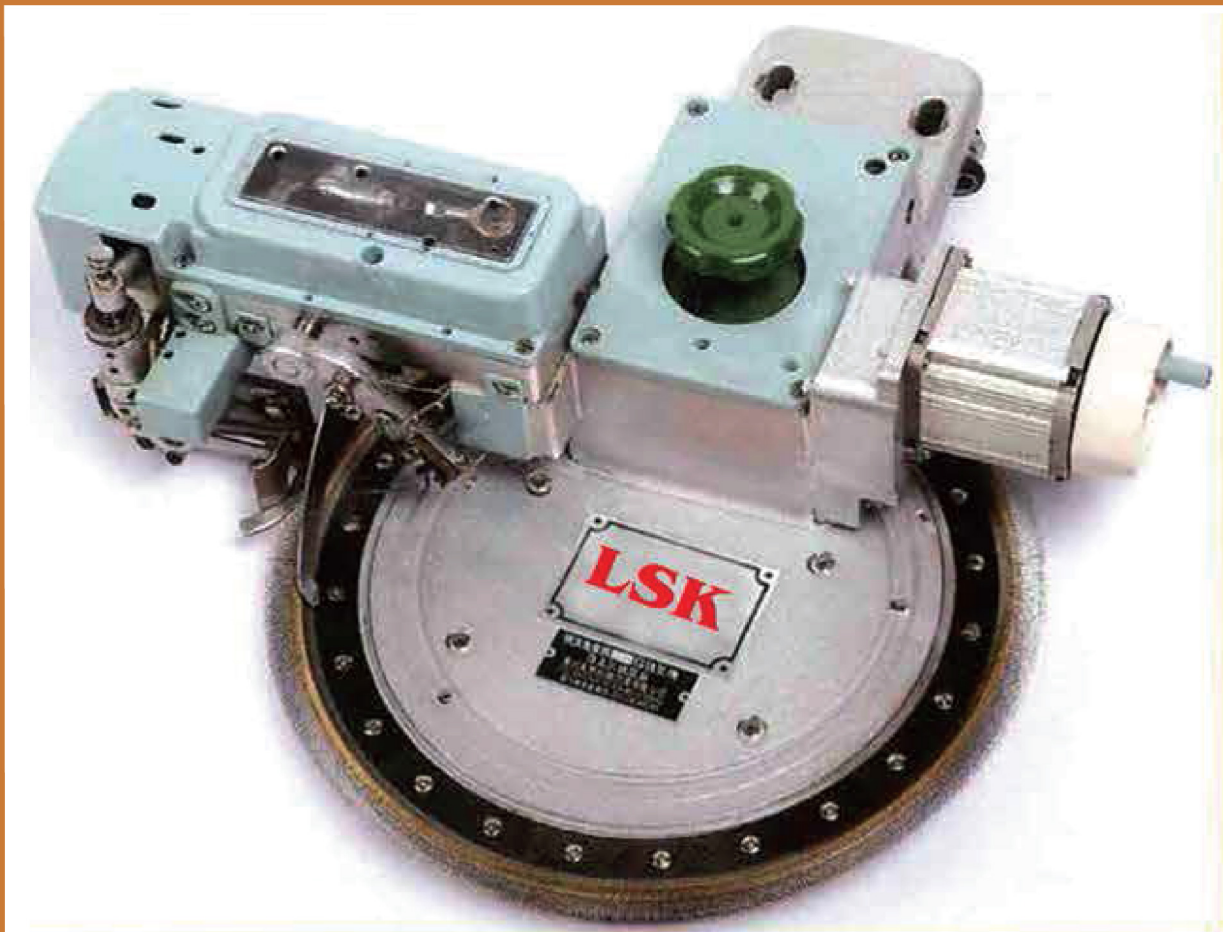

30% Production Increase  
70% Energy Saving




# Patent Introduction

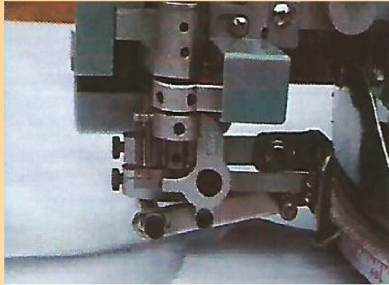


## 1. new yarn hooking mechanism:

High-precision system solve the trouble of old machine, such as skipping, loud-noise, unstable etc.

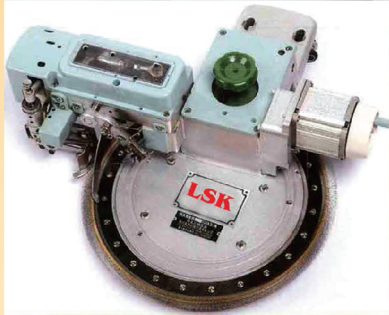


## 2. exterior design:

Multi-function cover is beautiful and can protect the machine.

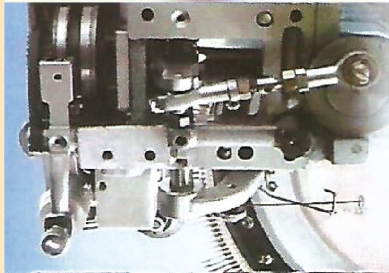


## 3. advanced transmission mechanism:

Through direct transmission system, improve the function.

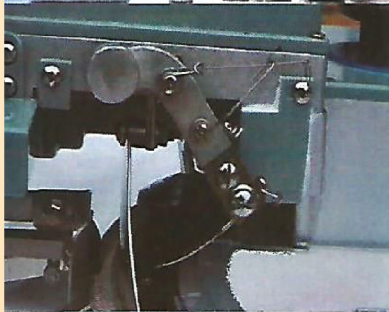


## The advantages

1. The traditional dial linking machine is multi-link system, easy to be loosen, cause the cloth uneven. Our specialty can solve the above trouble.
2. The machine be operated speed is increased to over 1000 RPM by the direct drive servo motor which provides variable speed control by the speed accelerator.
3. Several innovated patents increase efficiency.

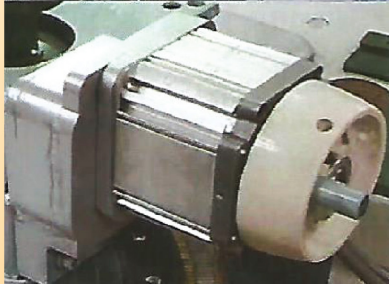

### Number Of Gauges

2G. 3G. 5G. 6G. 7G. 8G. 10G. 12G. 14G. 16G. 18G. 20G. 22G. 24G. 26G.

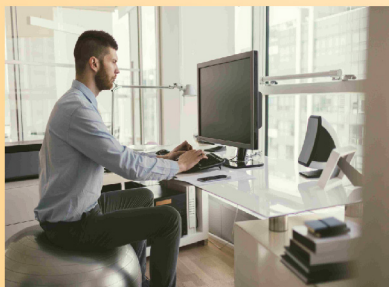

## Specification

Diameter of Dial Number	14
Number of Gauges	2-26 Guages
Motor Power	450w
Maximum Speed	1200 RPM
Weight	30 kg
Packing Measurement	600mmx570mmx255mm



# MAX CORPORATION

TOTAL APPAREL SOLUTION

**Corporate Office :** Plot - 4, Main Road -1, Room No -155 (7th Floor)  
Muktabangla Shopping Complex, Mirpur -1, Dhaka-1216, Bangladesh.  
Cell: +88 01730-110225, +88 01733-330506  
E-mail: maxcorporation4@gmail.com  
Web: www.maxcorporationbd.com

**Show Room :** Space No : 45, (1st Floor), Misco Super Market  
4 Darus Salam Road, Mirpur -1, Dhaka-1216, Bangladesh.